



ROCK-LINED SHOULDER DITCH
IN FILL SECTION

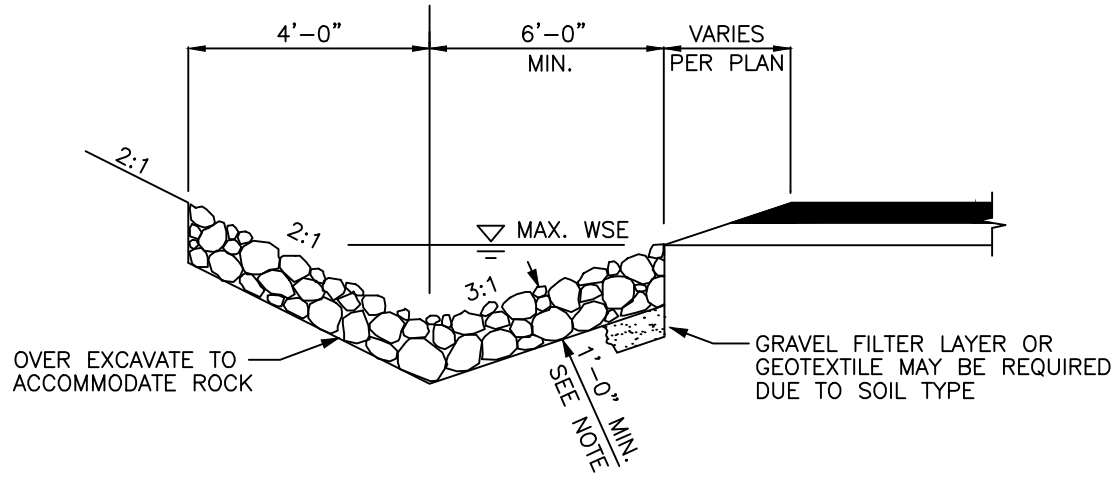

ROCK-LINED SHOULDER DITCH
IN CUT SECTION

NOTES:

1. ROCK LINED DITCHES TO BE USED WHEN FLOW VELOCITIES EXCEED 4 FPS.
2. ROCK SIZE AND DEPTH DEPENDENT ON FLOW VELOCITY. MINIMUM ROCK SIZE 2"-4" QUARRY SPALLS.

	<h1 style="margin: 0;">City of Bellevue</h1>	<p>STORM AND SURFACE WATER UTILITY</p>
<p>TITLE</p> <h2 style="margin: 0;">ROCK-LINED DITCHES</h2>		
<p>JANUARY 2022</p>	<p>NO SCALE</p>	<p>NO. <u>D-35</u></p>