


- ① EXISTING GRADE, TYP.
- ② LIGHT WEIGHT AND/OR POROUS FILL MATERIAL PER SPECIFICATIONS, SEE NOTE 2
- ③ GEOTEXTILE FABRIC PER SPECIFICATIONS, SEE NOTE 2
- ④ IMPORTED BASE COURSE PER SPECIFICATIONS
- ⑤ IMPORTED GRADING COURSE PER SPECIFICATIONS
- ⑥ TOPSOIL PER SPECIFICATIONS, 4" DEPTH MIN.
- ⑦ SHOULDER, TYP.



**NOTES:**

1. INSTALL 8" PVC CULVERT EVERY 100' O.C. ALONG TRAIL ALIGNMENT TO HELP FACILITATE WATER MOVEMENT AND DRAINAGE.
2. "BURRITO" UNDERLAYMENT: LIGHT WEIGHT AND/OR POROUS FILL MATERIAL WRAPPED IN GEOTEXTILE FABRIC. FILL MATERIAL TO BE DETERMINED BASED ON SITE CONDITIONS AND INTENDED APPLICATION (FLOTATION VS. DRAINAGE, OR BOTH).
3. ENCROACHING VEGETATION SHALL BE PRUNED BACK AS REQUIRED TO ALLOW ADEQUATE AND SAFE CLEARANCE FOR TRAIL USERS AND MAINTENANCE EQUIPMENT.

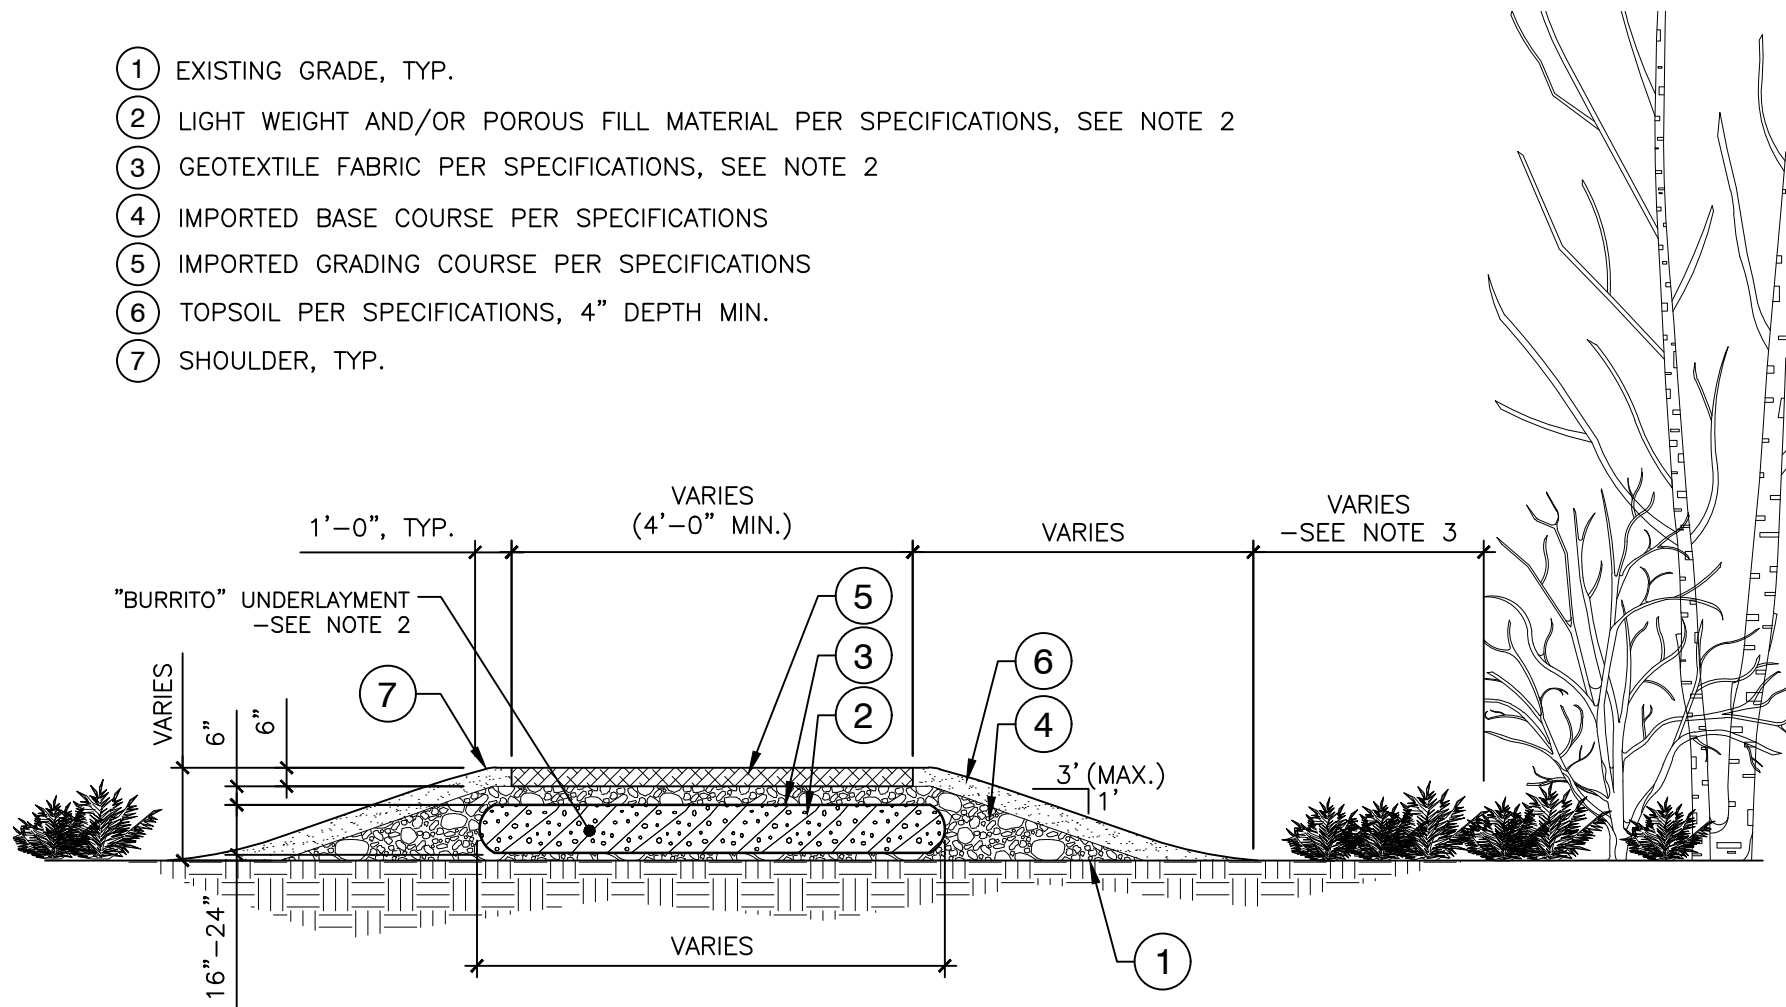

City of  
Bellevue

TITLE:

TRAIL - ON BOG SOILS

DRAWING #:	PK-TR-14
SCALE:	N.T.S.
REVISION DATE:	09-2023
DEPARTMENT:	PARKS